



Products Folder

THERMAL INNOVATIONS



Innovation, passion, quality.

I have always been fascinated by brilliant ideas. I appreciate high quality things. I put passion into everything I do. Led by these values, I founded TML in the seventies, and I still stick to those values nowadays. In more than 40 years, together with my sons before, and with my grandchildren today, we have always worked with the main goal to offer innovative products that could adapt to the customer needs, to the development of the MEP sector, to energy efficiency needs and to the environment.

Over the years, we have constantly invested in technology, innovation and human resources, and today we are massively investing in process automation to increase our production capacity and improve the quality of our products. Quality

is our focus: since the beginning of this journey, for me it has always been extremely important to provide my customers with high quality products. In fact, I've always believed that supplying an excellent product was the only way to reward the trust of our customers.

Today we live in a very competitive world, nonetheless we have never failed to follow this principle, since we strongly believe that respect for our customer is the key to successful and long-term relationships. Sticking to high-quality standards is possible only with the commitment and Passion that we dedicate every day to our job here in TML. I'm proud to rely on the full support of all our workforce, through which we gained our current share in the market.



Salvatore Loddò

Founder and CEO

TML Worldwide



2000 Worldwide customers



Our facilities



Headquarter, R&D dept., production
facility for carbon steel products
and enamelling plant

Favale di Civitella del Tronto - Teramo
Total area: 35000 m²
Covered area: 14000 m²

+50 Years
of experience

55.000 Tanks per year
(productive capacity)

1500 Hours per year dedicated
to design, research and development

1,5 MWh Photovoltaic energy
produced per year

96.000m² Total area

24.000m² Covered area

The company now boasts manufacturing facilities in Abruzzo and Sardinia, operating on a total area of about 96.000 m², of wich 24.000 m² covered.



Fuel tanks production facility

Abbasanta (OR) - Sardinia
Total area: 5000 m²
Covered area: 2500 m²

Sales and Admin. offices, production facility for stainless steel products, insulation and logistics dept.

Floriano di Campli - Teramo
Total area: 44000 m²
Covered area: 6000 m²



Solutions for heat pumps






Solutions for heat pumps

WP - Calorifier with fixed coil for heat pumps



Calorifiers made of AISI 316L Stainless steel or glass lined carbon steel, designed for the production and storage of domestic hot water. They are equipped with one or two internal fixed coils that can be provided with hot water by a heat pump, a solar system and/ or a boiler. The special heat exchanger with double pipe, allows a more efficient

spread of the power delivered by the heat pump on the coldest part of the cylinder, thus reducing the number of on-off cycles of the compressor and increasing its lifespan. The wide range of capacities (from 200 to 2000 liters) allows their installation in several systems, from domestic use to commercial applications.

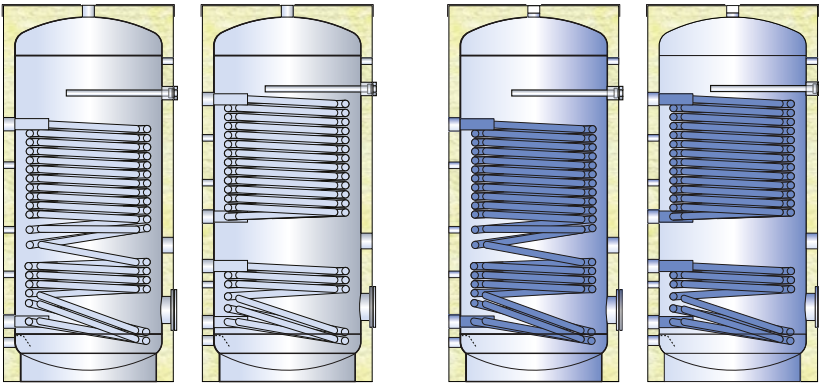

Technical features


	WP1X / WP2X	WP1V / WP2V
Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	200 ÷ 2000	
Heat exchanger	1 or 2 double pipe coils	
Insulations	Injected polyurethane or polyester with Sky jacket	
ErP Class	B class up to 500 L. - C class from 600 to 2000 L.	

TWIN - Two-in-one calorifier/buffer storage tank for heat pumps



The system consists of two cylinders in a single body: a calorifier for the production and storage of domestic hot water (DHW) equipped with a high efficiency heat exchanger for heat pumps + a primary water storage tank

for the heating/cooling system. The calorifier body is available either in stainless steel or glass lined steel. The buffer storage tank is made only in carbon steel.

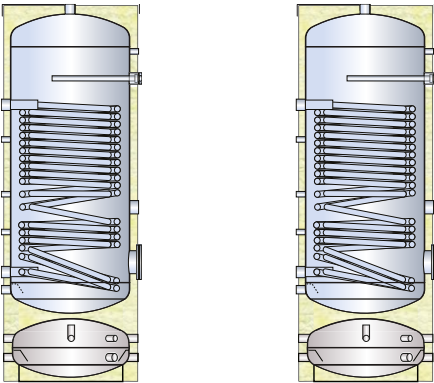



Technical features

	TW1X	TV1V
Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	200 ÷ 500	
Heat exchanger	1 double pipe coil	
Insulations	Injected polyurethane with Sky jacket	
ErP Class	B class	

Solutions for heat pumps

High performance combined storage tank for heat pumps Smartwarm HP

Smartwarm HP is a combined storage tank for primary water with instantaneous production of domestic hot water. It is designed to work with low temperatures heat sources such as the modern hydronic heat pumps. It is available also with an auxiliary solar coil.



Technical features

SMOHP



SM1HP

Material	S235 Jr Carbon steel	
Capacity L.	300 ÷ 400	
Heat exchanger	1 (DHW) corrugated stainless steel pipe	2 (DHW + solar integration) corrugated stainless steel pipes
Insulations	Injected polyurethane with Sky jacket	
ErP Class	B class	

High performance combined storage tank for heat pumps Twin HP

Twin HP is a combined storage tank for primary water with instantaneous production of domestic hot water. It is designed to work with low temperatures heat sources such as the modern hydronic heat pumps. The Twin HP model consists of two cylinders in a

single body: the upper tank is a buffer store for primary water aimed at the instantaneous production of domestic hot water. The lower tank is a buffer store for primary water for the heating/ cooling system.



Technical features

TW0HP

TW1HP


Material	S235 Jr Carbon steel	
Capacity L.	300 ÷ 400	
Heat exchanger	1 (DHW) corrugated stainless steel pipe	2 (DHW + solar integration) corrugated stainless steel pipes
Insulations	Injected polyurethane with Sky jacket	
ErP Class	B class	

ACFX - LW



Buffer vessel for the storage of heating and cooling water. Besides its main function of buffer storage tank this equipment works also as low loss header thus making the heat source flow independent from the flow of the system

where it is connected. Specially designed to be used in systems with heat pumps, it's coated with a vapor seal insulation with low thermal dispersion and metal cladding. Designed for wall mounting.

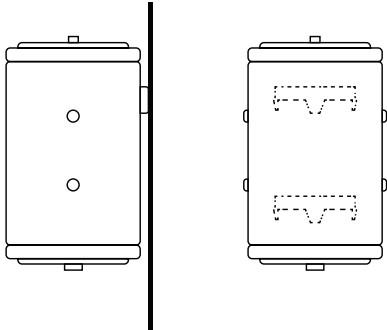

Technical features


ACFX-LW

Material	AISI 304 stainless steel
Capacity L.	15 ÷ 100
Insulations	Injected polyurethane + metal cladding


ACF - Heating and cooling water buffer storage tank for heat pumps

Buffer storage tank for the storage of heating and cooling water. Besides its main function of buffer storage tank this equipment works also as low loss header thus making the heat source flow


independent from the flow of the system where it is connected. Specially designed to be used in systems with heat pumps, it is coated with a vapor seal insulation with low thermal dispersion.



12 - 50 Lt



100 - 1000 Lt

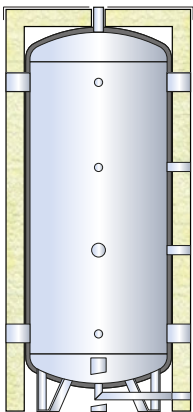

1500 - 5000 Lt

Technical features

ACFX

ACFV

ACF


Material	AISI 304 stainless steel	Glass lined steel	S235Jr carbon steel
Capacity L.	200 ÷ 1000	200 ÷ 1000	100 ÷ 5000
Insulations	Injected polyurethane or expanded polyethylene + polyester with Sky jacket		
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.		

Solutions for heat pumps



ACF - QW QUBOTTO



Thermal store for the storage of heating and cooling water. Besides its main function of buffer storage tank, this equipment works also as low loss header thus making the heat source flow independent from the flow of the system where it is connected. Specially designed to be used in systems with heat pumps, it's insulated with directly injected polyurethane with low thermal dispersion.

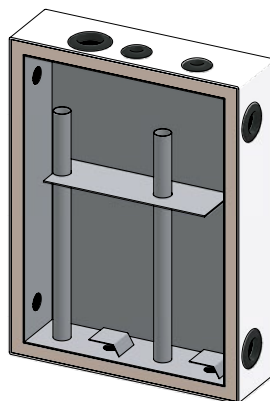

- Designed to receive heat flows from two different heat sources, promoting thermal stratification due to the presence of internal baffles;
- Increaseable storage: using the connection kit, 2 or more storage units can be connected together to meet the most demanding technical requirements;
- Designed for quick connection to circulating modules (lower connections have standard distance between centers);
- Designed for wall mounting

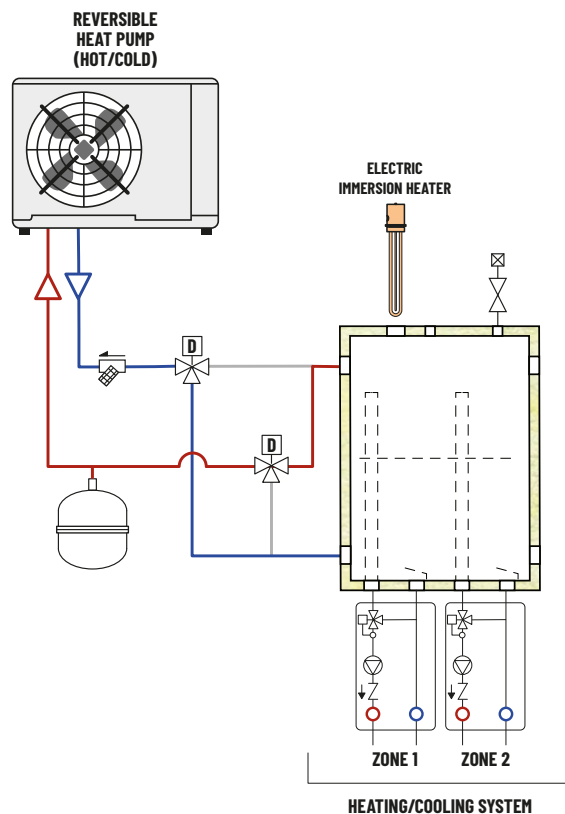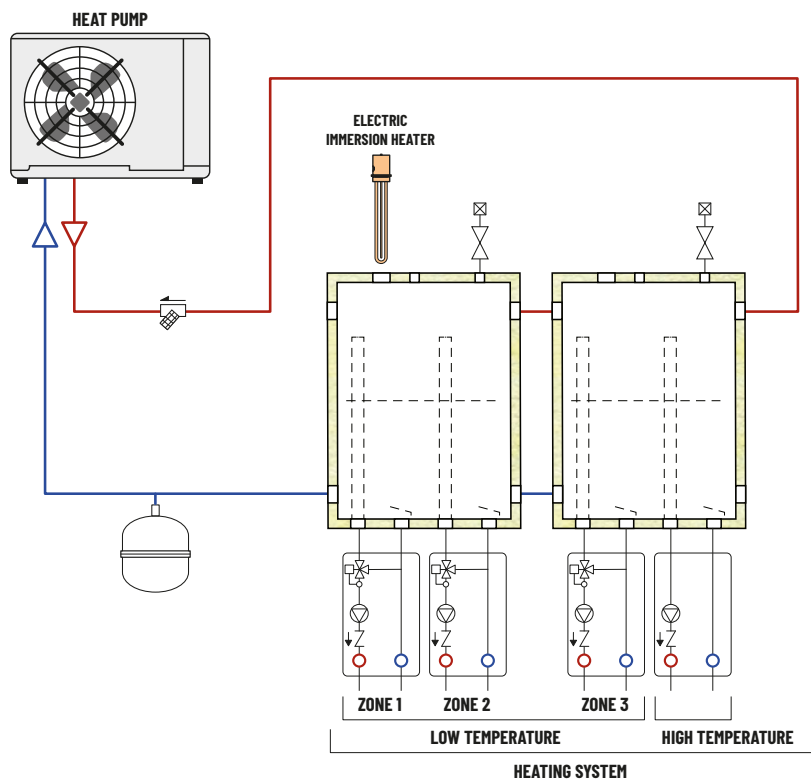

Technical features

	ACFQWX	ACFQW
Material	AISI 304 stainless steel	S235Jr carbon steel
Capacity L.	50 ÷ 75	
Insulations	Injected polyurethane + metal jacket	

Solutions for domestic hot water (DHW)







Solutions for domestic hot water

MPR - Indirect fresh water station

Fresh water station for DHW production and buffer storage loading. The plug-and-play system for quick installation consists of a heat exchanger

kit complete with a domestic hot water circulation pump, accessories, and a smart control unit with PID logic, housed in a fully insulated floor-standing container.

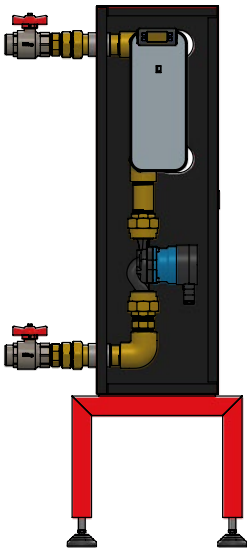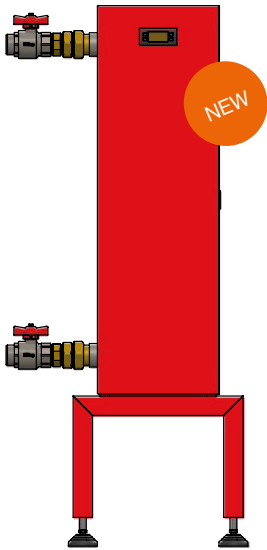

Technical features



MPR

Power	15 ÷ 265 kW
Primary side working temperatures	55 ÷ 80 °C
Plate heat exchanger	Brazed

PR – Fresh water station with plate heat exchanger

Fresh water station designed for the production and storage of domestic hot water). It is composed by a storage tank (available in AISI 316L stainless steel or glass lined steel) and a plug & play system

for a quick installation, consisting of PHE kit complete with DHW circulation pump, accessories and a smart control unit with PID logic, housed in an insulated container.

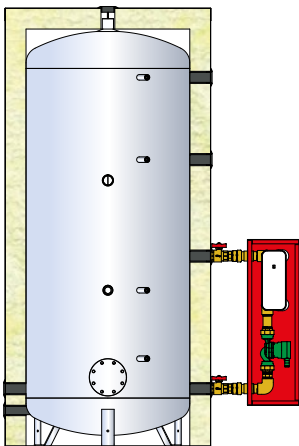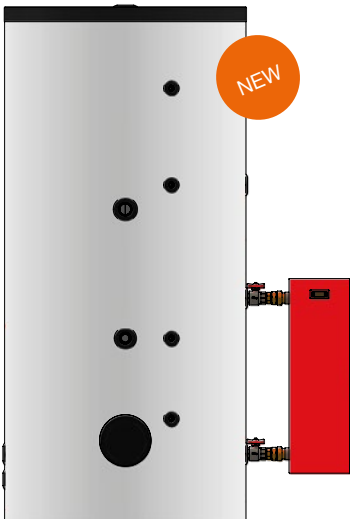

Technical features


PRX

PRV

Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	200 ÷ 2000	200 ÷ 2000
Heat exchanger	Brazed	
Insulations	Injected polyurethane or polyester with Sky jacket	
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.	


Solutions for domestic hot water

HWP mini - Direct fresh water station

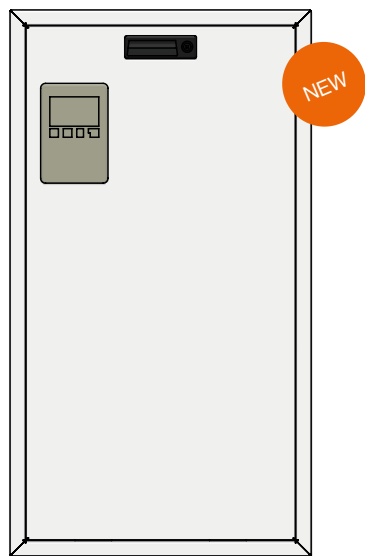

HWP mini is a plug-and-play module for DHW production on small to medium scale systems. These modules are completely factory assembled, configured, wired and ready to use.

The control unit grants the production of DHW, protection against legionella and limescale as well as the recirculation that can be scheduled according to specific time-tables or temperatures (optional).

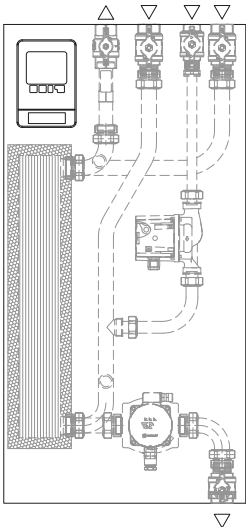

Technical features

HWP mini


Power	50 ÷ 264 kW
Flow rate	40 and 100 L/min
Plate heat exchanger	Brazed

Combined buffer storage tank Modulmax



Combined buffer storage tank for heating water with instantaneous production of domestic hot water through an external fresh water station.

Available also with one auxiliary heat exchanger.

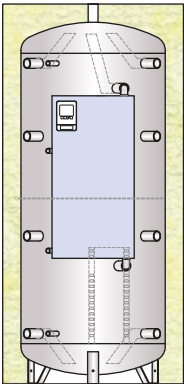

Technical features

MDM




Material	S 235 Jr carbon steel
Capacity L.	600 ÷ 2000
Heat exchanger	Brazed PHE
Insulations	Injected polyurethane or polyester with Sky jacket
ErP Class	B class for 600 L - C class from 800 to 2000 L

Solutions for domestic hot water

HWP - Direct & indirect fresh water stations

HWP units are plug-and-play modules for the preparation of domestic hot water on medium/large size systems. These modules are completely factory assembled, configured, wired and ready to use. They can cleverly satisfy different applications with a high level of reliance and comfort. The new control unit panel and the circulation pump can be oriented towards different directions, allowing a more agile monitoring of the working parameters regardless of the installation position of the HWP module.

The advanced control unit grants the production of DHW, and the functions of recirculation, protection against legionella and limescale as well as the buffer loading. HWP modules are available also with a twin circulation pump and can be equipped with a "Multigateway" device to have remote access to the control unit (allowing remote monitoring and maintenance) and to be connected to a BMS.

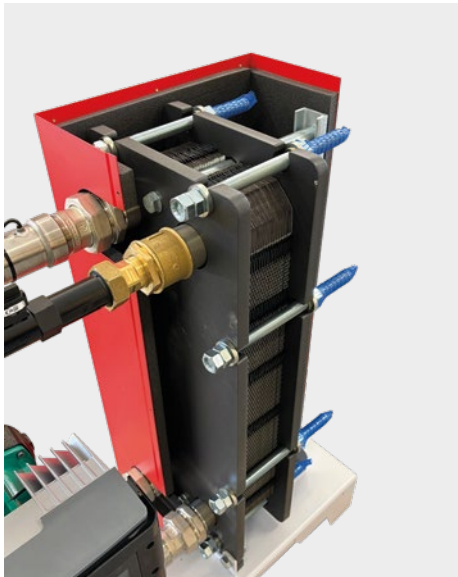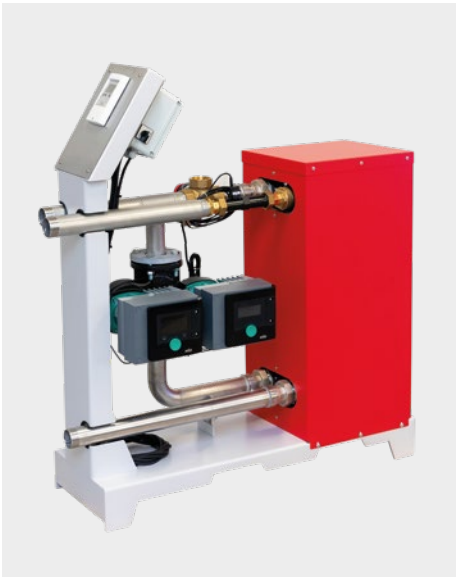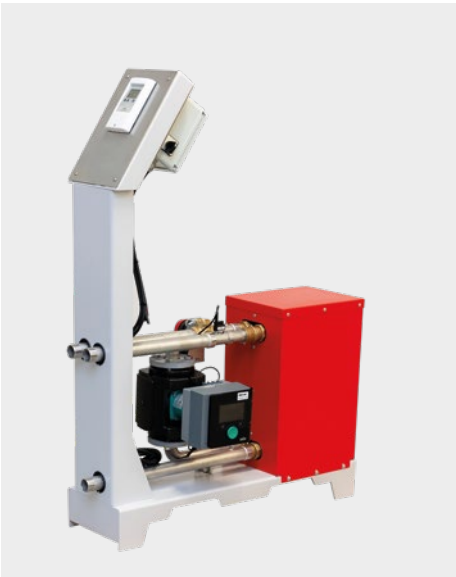


Technical features

HWP D / HWP I


Power	120 - 1170 kW
Flow rate	45 - 475 L/min
Heat exchanger	Gasketed stainless steel plates heat exchanger

System layout for HWP D directly connected to a heat source (indicative)

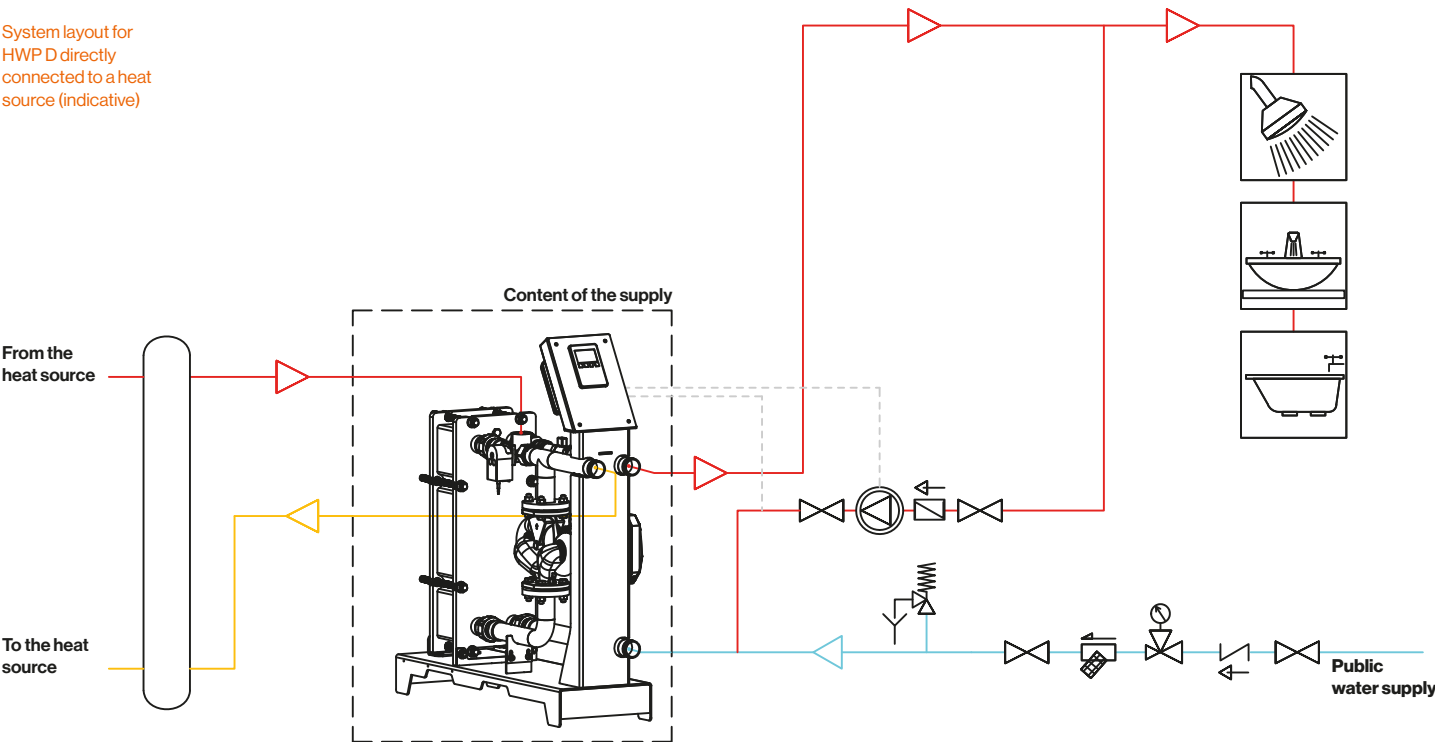

Solutions for domestic hot water

System layout for
HWP I directly
connected to a heat
source (indicative)

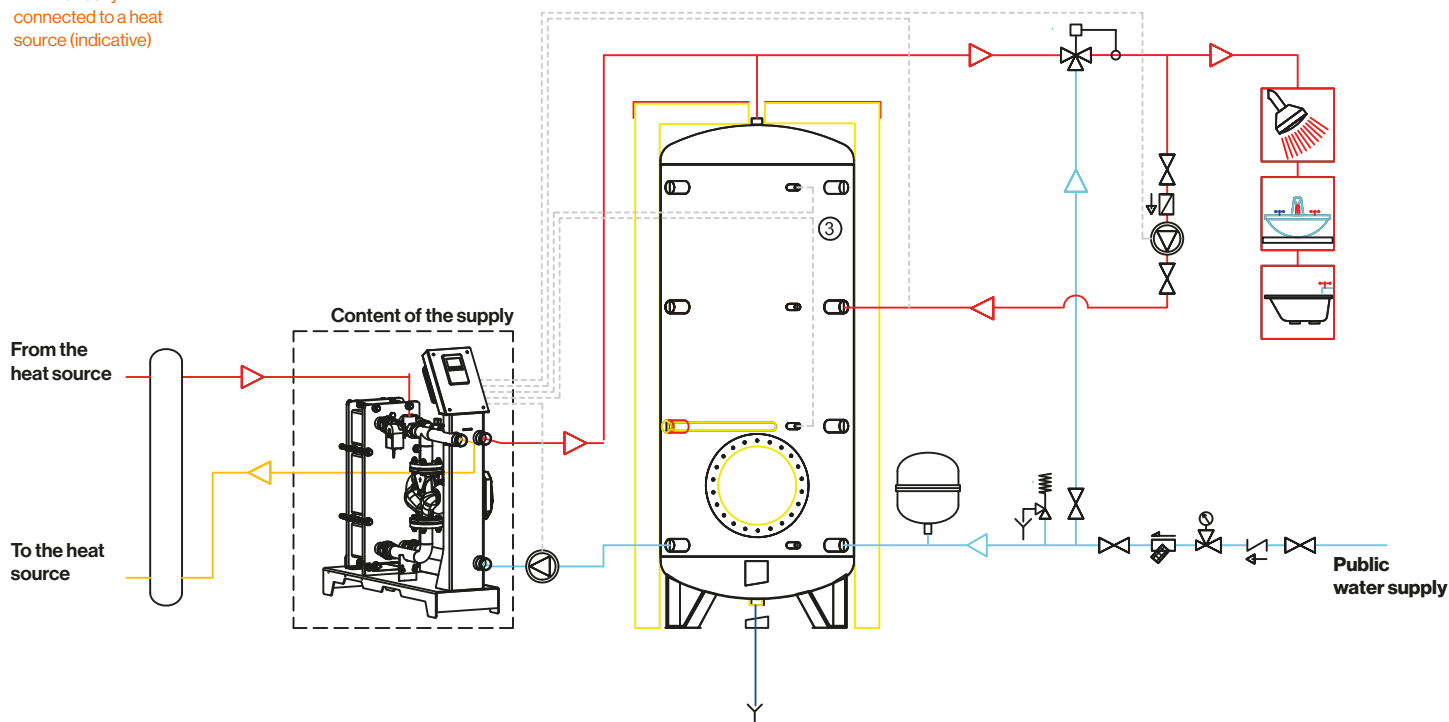


In case of systems with a very high demand of DHW, the HWP D units can be installed in cascade system up to 5 modules. This system configuration allows to share

the DHW production among all the units thus enhancing the liability of the system. Furthermore this system configuration is really useful when the production of DHW must be modulated in order to improve the

reliability of the system and to reduce consumption in systems where the withdrawal of DHW can vary according to the seasonal demand, such as in the case of hospitality applications.

Indicative system layout
for a 3 "cascade"
HWP D system
directly connected
to a heat source

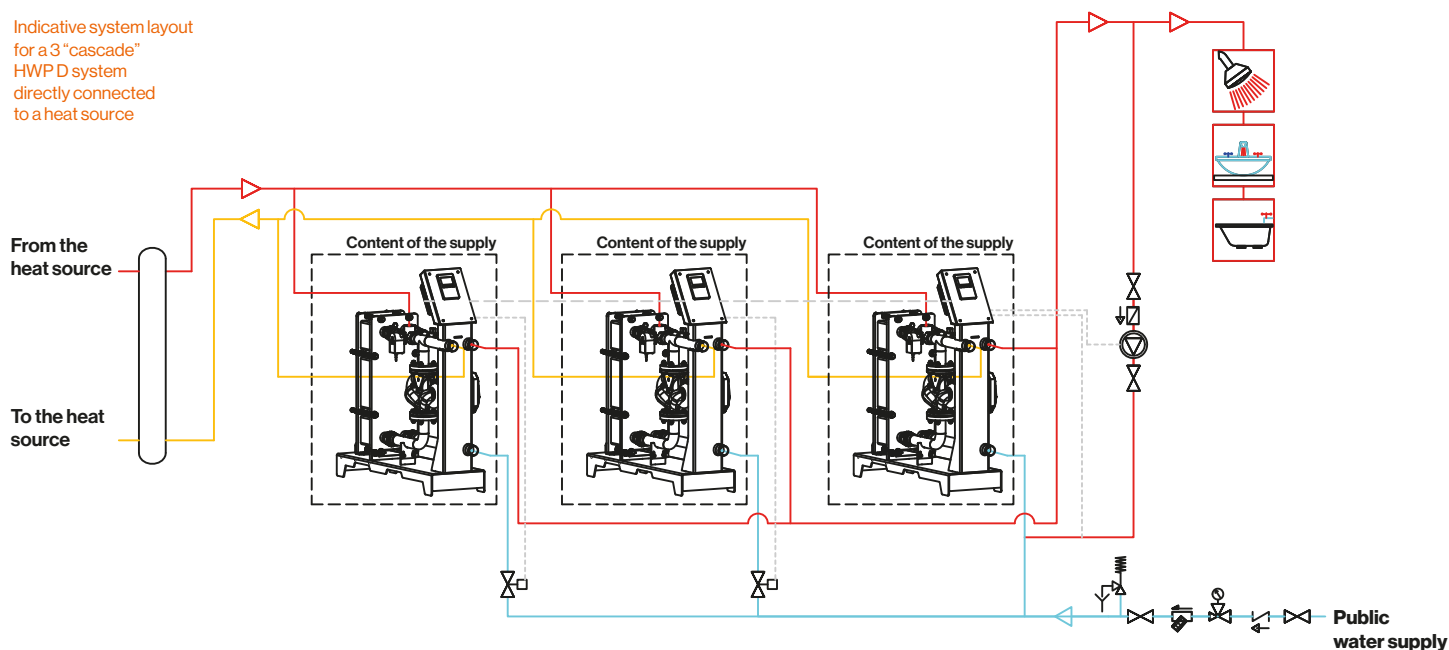


Solutions for domestic hot water

AISI 316L Stainless steel calorifier ECO LINE

ECO LINE calorifiers are made of AISI 316L Stainless steel designed for the production and storage of domestic hot water with internal fixed coil.

Available with one or two heat exchangers with an advanced design. Eco-Line is the best entry level solution for domestic use.

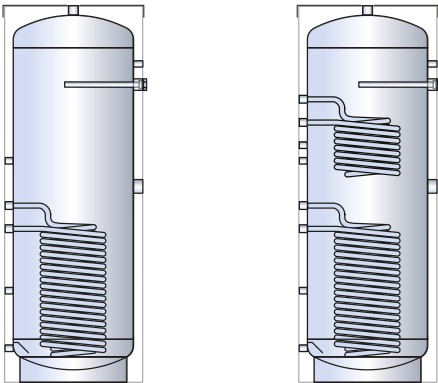


Technical features

	ECO1	ECO2
Material	AISI 316L Stainless steel	
Capacity L.	150 ÷ 500	
Heat exchanger	1 fixed coil	2 fixed coils
Insulations	Injected polyurethane with Sky jacket	
ErP Class	B class	

SF/DSF – Calorifiers with fixed coil

Calorifiers made of AISI 316L stainless steel or glass lined carbon steel, for the production and storage of domestic hot water. They are equipped with one or two fixed coils suitable for boilers

or solar systems. They are the best choice for every system, from domestic use to commercial applications that need to rely on a highly efficient product.

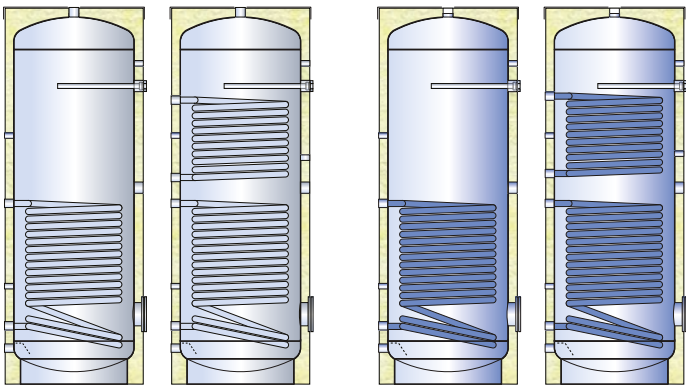

Technical features




	SFI / DSFI	SFV / DSFV
Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	150 ÷ 5000	150 ÷ 2000
Heat exchanger	1-2 fixed coils	
Insulations	Injected polyurethane or polyester with Sky jacket	
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.	

Solutions for domestic hot water

BV1/BV2 - Calorifiers with removable heat exchangers

Calorifiers designed for the production and storage of domestic hot water equipped with removable stainless steel heat exchangers.

Available in AISI 316L Stainless steel, glass lined or Keramtech lined steel.

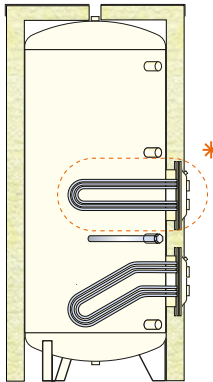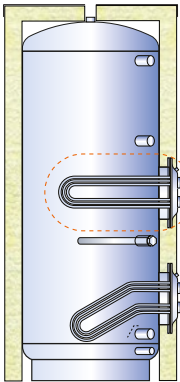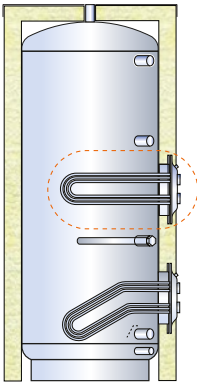

Technical features



* All models are available with one or two heat exchangers. Available also with steam to water heat exchangers.

	BV1X / BV2X	BV1V / BV2V	BV1K / BV2K
Material	AISI 316L Stainless steel	Glass lined steel	Keramtech lined steel
Capacity L.	200 ÷ 5000	200 ÷ 2000	2500 ÷ 5000
Heat exchanger	1-2 removable stainless steel U tube bundles		
Insulations	Injected polyurethane or polyester with Sky jacket		
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.		

BM - Wall mounting calorifiers

Calorifier for the production and storage of domestic hot water equipped with fixed coil.

Available in AISI 316L stainless steel and glass lined steel. Equipped with brackets for wall mounting in vertical or horizontal position.

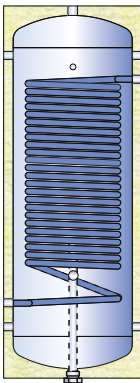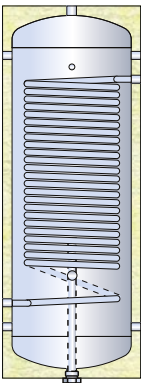

Technical features


	BMX	BMV
Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	100 ÷ 200	100 ÷ 200
Heat exchanger	1 fixed coil	
Insulations	Injected polyurethane with Sky jacket	
ErP Class	C class	

Solutions for domestic hot water

DHW Buffer storage tanks ELX, ELV

Thermal stores for the storage of domestic hot water. Equipped with an inspection hatch that can be used to equip the tank with an immersion heater. These buffer vessels can also

be combined with our fresh water stations PR in order to be used from small to medium size systems. Available in AISI 316L Stainless steel or glass lined steel.

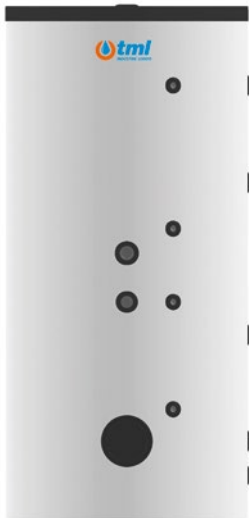




Technical features

	ELX	ELV
Material	AISI 316L Stainless steel	Glass lined steel
Capacity L.	200 ÷ 2000	200 ÷ 2000
Insulations	Injected polyurethane or polyester with Sky jacket	
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.	

DHW Buffer storage tanks ATX, ATV, ATK

Thermal stores for the storage of domestic hot water. Equipped with an inspection hatch that can be used to equip the tank with an immersion heater or a removable heat exchanger. These buffer vessels can also

be combined with our HWP stations in order to be used from small to medium/large size systems. Available in AISI 316L Stainless steel or glass lined/Keramtech lined steel.

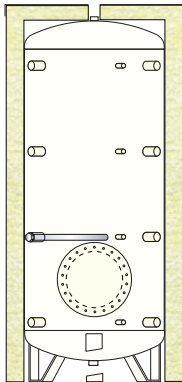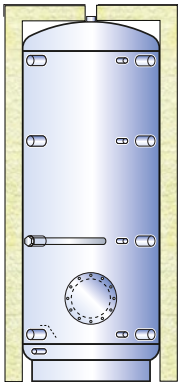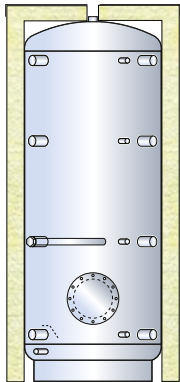




Technical features

	ATX	ATV	ATK
Material	AISI 316L Stainless steel	Glass lined steel	Keramtech lined steel
Capacity L.	200 ÷ 5000	200 ÷ 2000	2500 ÷ 5000
Insulations	Injected polyurethane or polyester with Sky jacket		
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.		

Solutions for domestic hot water

MXW - Combined buffer storage tank Maxiwarm

Combined buffer storage tank for heating water with instantaneous production of domestic hot water through a highly efficient heat exchanger made of a corrugated AISI 316L stainless steel pipe. Available also with one or two auxiliary heat exchangers.

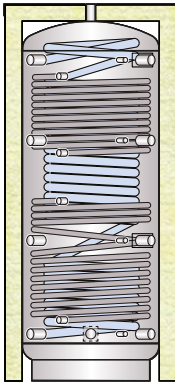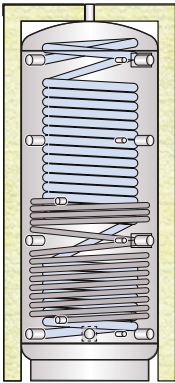
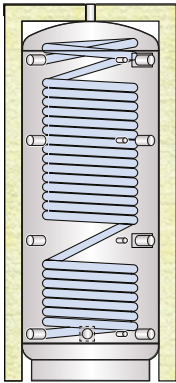


Technical features

	MX0W	MX1W	MX2W
Material	S 235 Jr carbon steel		
Capacity L.	600 ÷ 2000		
Heat exchanger	1 DHW heat exchanger + 1 or 2 fixed coils		
Insulations	Injected polyurethane or polyester with Sky jacket		
ErP Class	B class for 600 L. - C class from 800 to 2000 L.		

SMX - Combined buffer storage tank Solarmax


Combined buffer storage tank for heating water with instantaneous production of domestic hot water through a high efficiency heat exchanger made of a corrugated AISI 316L stainless steel pipe. It is equipped with an innovative system of fluid distribution that enhances its performance in the most critical working conditions. Available also with one or two auxiliary heat exchangers.

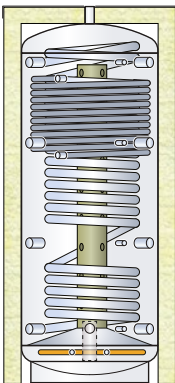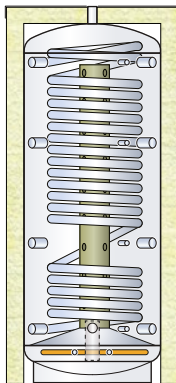


Technical features

	SM1X	SM2X
Material	S 235 Jr carbon steel	
Capacity L.	600 ÷ 2000	
Heat exchanger	1 DHW heat exchanger + 1 or 2 fixed coils	
Insulations	Injected polyurethane or polyester with Sky jacket	
ErP Class	B class for 600 L. - C class from 800 to 2000 L.	

Solutions for primary water



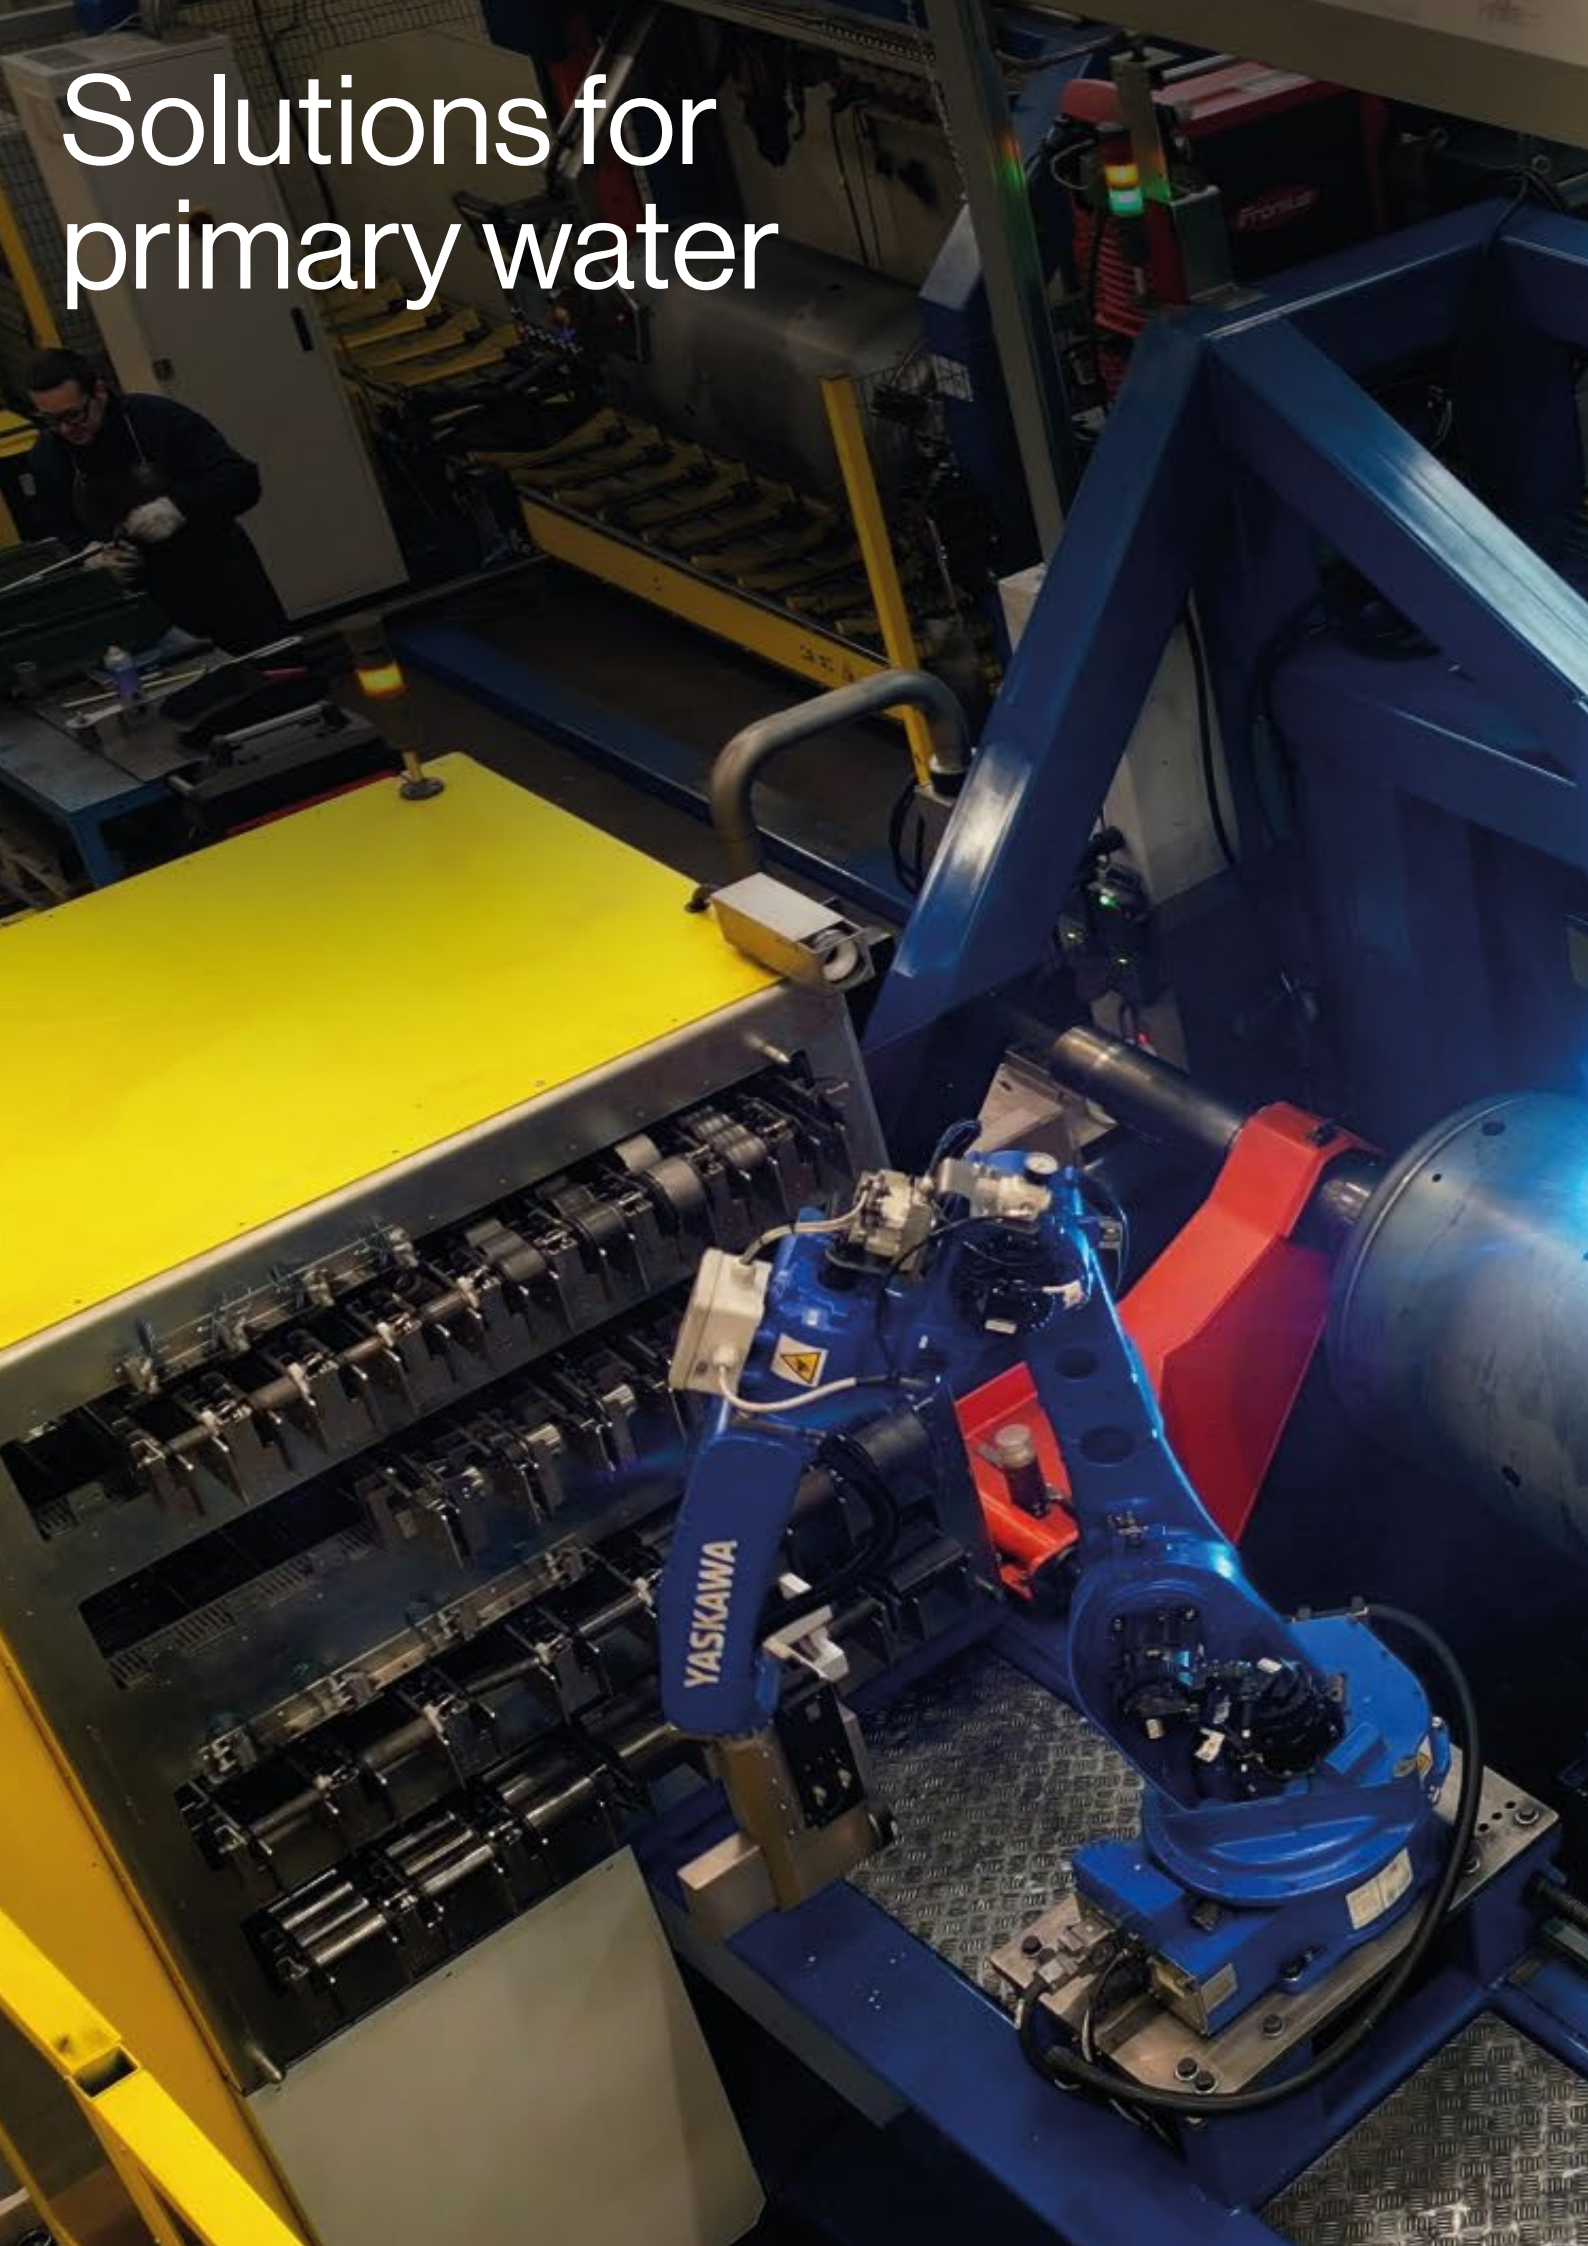


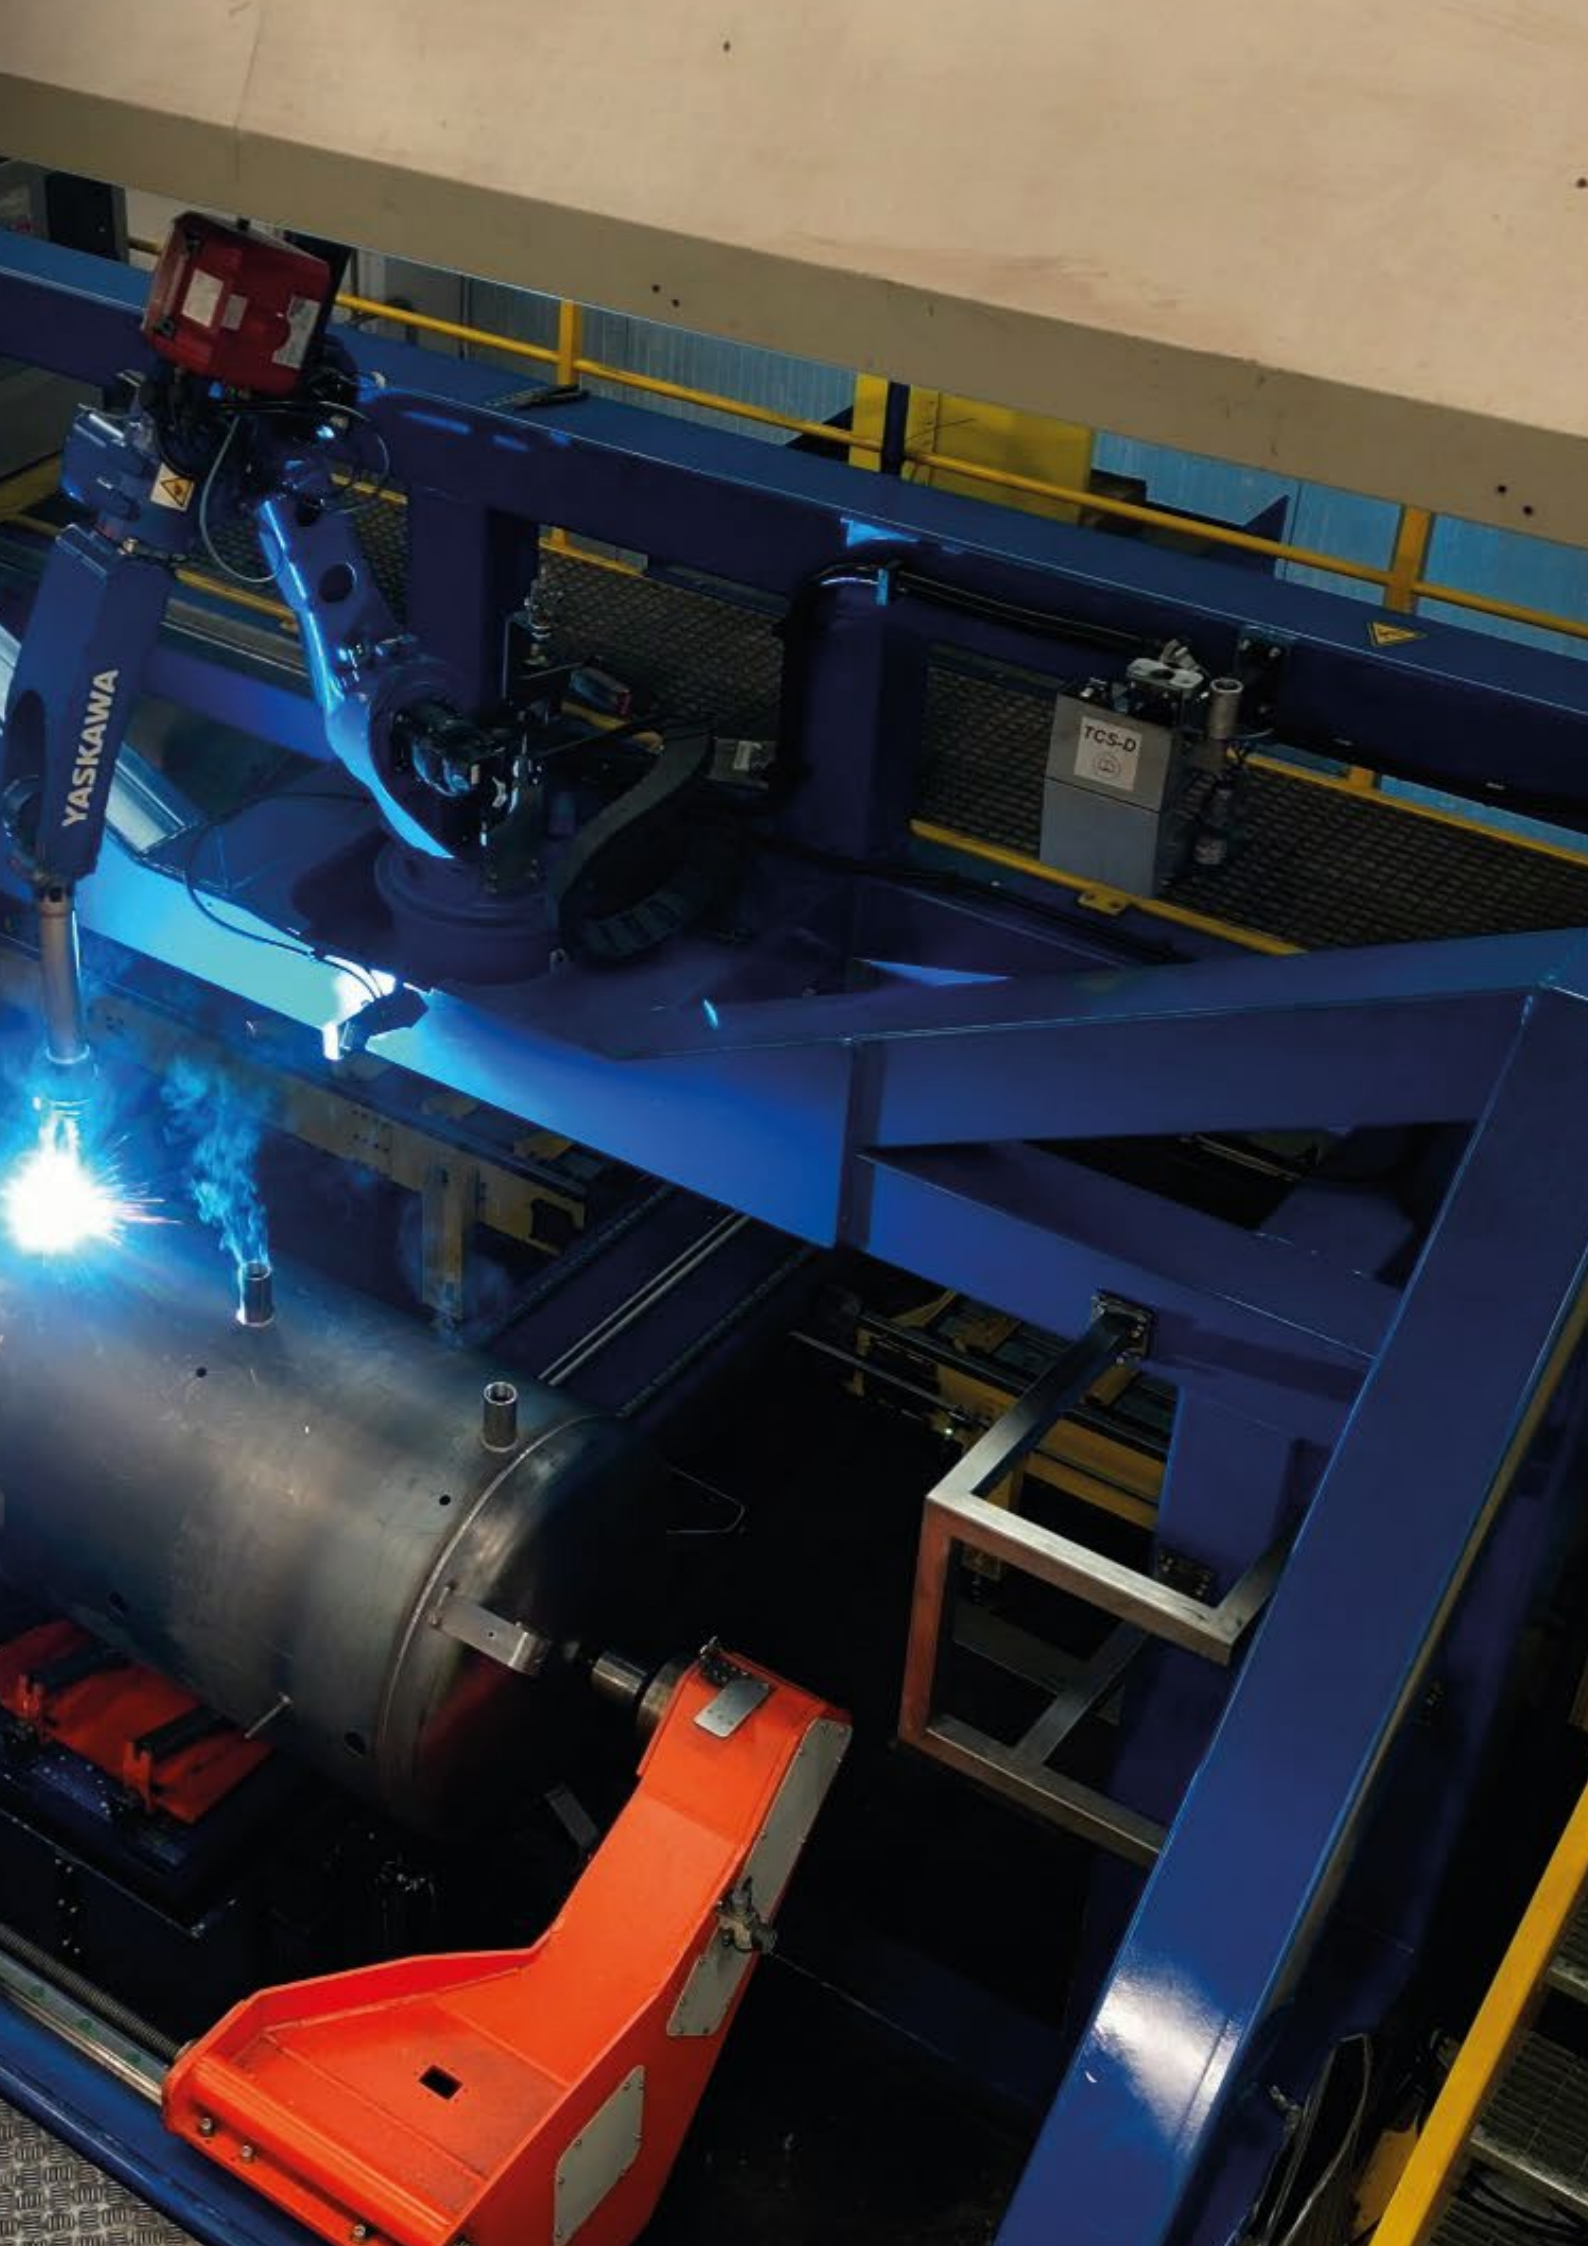

Solutions for primary water

PF/PFS/PFSS - Hot water buffer storage tank pufferspeicher

Buffer vessel for the storage of heating water produced from continuous and discontinuous heat sources. Available also with one or two auxiliary coils. On demand, they can be equipped with flanged connections.

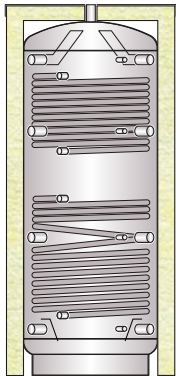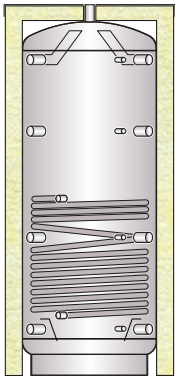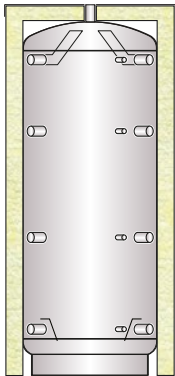


Technical features

	PF	PFS	PFSS
Material	S 235 Jr carbon steel		
Capacity L.	300 ÷ 5000		
Heat exchanger	0	1 fixed coil	2 fixed coils
Insulations	Injected polyurethane or polyester with Sky jacket		
ErP Class	B class up to 600 L. - C class from 800 to 2000 L.		

PFXXL - Extra large hot water buffer storage tank

Buffer vessel for the storage of big amount of heating water produced from continuous and discontinuous heat sources. Specifically designed to work

with biomass systems, heating districts, industrial plants. On demand, they can be equipped with flanged connections.

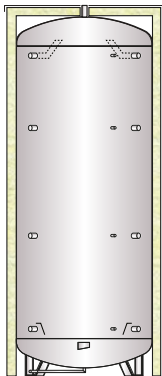

Technical features

	PFXXL
Material	S 235 Jr carbon steel
Capacity L.	6000 ÷ 30000 / on demand up to 100.000 L.
Insulations	Soft polyester with Sky jacket

Solutions for primary water

AR - Chilled water buffer store




Buffer storage tank for the storage of cold water for chillers and air conditioning systems, equipped with high size ports to allow large flow rates. Available in AISI 304 stainless steel, galvanized steel or carbon steel. Besides its main function of buffer storage tank,


this equipment works also as low loss header thus making the heat source flow independent from the flow of the system where it is connected. On demand, they can be equipped with flanged connections and baffle plates. Available also with anti UV cladding.



ARX

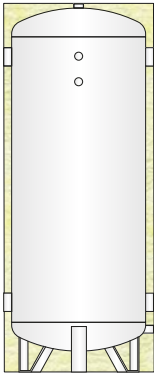

ARZ

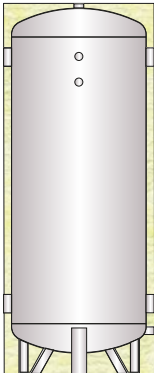

ARN

Technical features


Material	AISI 304 Stainless steel	Galvanized carbon steel	S 235 Jr carbon steel
Capacity L.	100 ÷ 5000	100 ÷ 5000	100 ÷ 5000
Insulations	Injected polyurethane or expanded polyethylene with Sky jacket		

ACF - Heating and cooling water buffer storage tank for heat pumps




Buffer storage tank for the storage of heating and cooling water. Besides its main function of buffer storage tank this equipment works also as low loss header thus making the heat source flow


independent from the flow of the system where it is connected. Specially designed to be used in systems with heat pumps, it's coated with a vapor seal insulation with low thermal dispersion.



12 - 50 Lt



100 - 1000 Lt

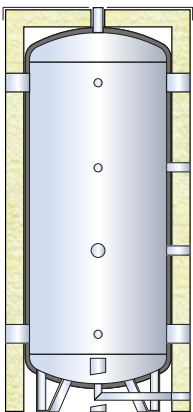

1500 - 5000 Lt

Technical features

	ACFX	ACFV	ACF
Material	AISI 304 stainless steel	Glass lined steel	S235Jr carbon steel
Capacity L.	25 ÷ 1000	100 ÷ 1000	12 ÷ 5000
Insulations	Injected polyurethane or expanded polyethylene + polyester with Sky jacket		
ErP Class	B class up to 500 L. - C class from 800 to 2000 L.		

Solar Systems


Elios solar collector



Elios solar collectors are the optimal solutions in areas with low solar irradiation. Its modular mounting kit allows the installation of the collector either on flat or pitched roof. Solar Keymark certified according to ENI 12975 and EN ISO 9806:2013

The kit includes: the collector(s), the calorifier and all the pipes and fittings to connect them. Furthermore, safety valve, check valve and supports for flat or pitched roof are supplied as well.

Natural circulation solar kits

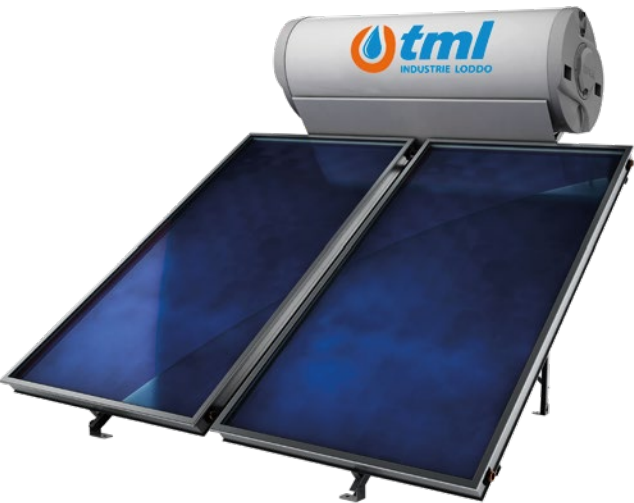

Technical features

	SCN
Material	Glass lined steel
Capacity L.	160 - 200 - 300
Insulations	Injected polyurethane with metal cladding
Collector area	2,3 m ²

Accessories for solar systems

CS1G – One-way solar module with electronic control unit

- 8-28 l/min. flow rate with adjuster and draining valves
- High efficiency circulation pump
- 3-way valve with check valve equipped with thermometer
- Safety group with a 6-bar safety valve, pressure gauge and connection for expansion vessel.
- Pre wired electronic control unit
- Max power 50 kW



CS2G – Two-way solar module with electronic control unit

- 8-28 l/min. flow rate with adjuster and draining valves
- High efficiency circulation pump
- 3-way valve with check valves equipped with thermometers
- Safety group with a 6-bar safety valve, pressure gauge and connection for expansion vessel.
- Pre wired electronic control unit
- Max power 50 kW



VES - Expansion vessel for solar systems

Solar systems expansion vessel, with anti-scale SBR rubber membrane. Equipped with wall mounting bracket.



	VES 18	VES 24	VES 36
Capacity L.	18	24	36
Preload -working pressure	3-8 bar		
Working temperature	From -10 °C to +110 °C		

VMT - Thermostatic mixing valve

Anti-scalding thermostatic mixing valve for small and medium applications.



VS525 - Loading/drainage valve

Loading and draining ball valve for solar systems.


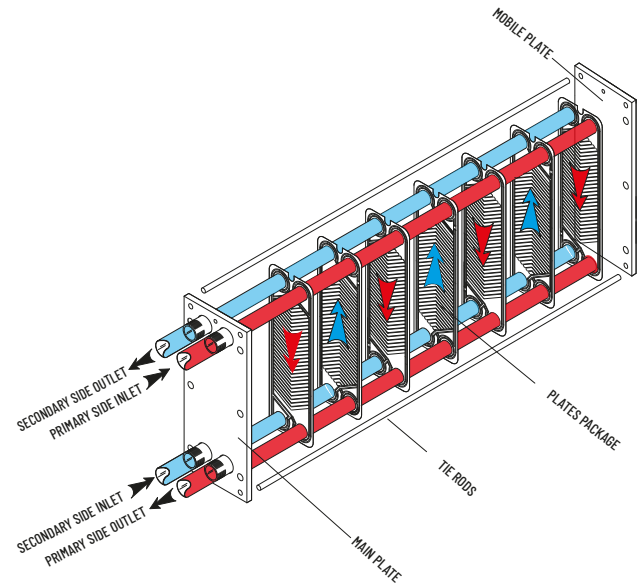


Plate heat exchangers

Plate heat exchangers

The purpose of a plate heat exchanger (PHE) is to transfer the heat between two fluids with different chemical-physical composition that can't be mixed together. PHE are preferred to U tube heat exchangers, coils, etc. when it is necessary to comply with specific conditions such as long

lifespan. With gasketed plates, it is possible to inspect the heat exchanger and to modify its performance by adding or removing plates. Compact size. High heat exchange ratings. Heat exchanger plates are built in compliance with PED Directive 2014/68/UE (Pressure Equipment Directive).

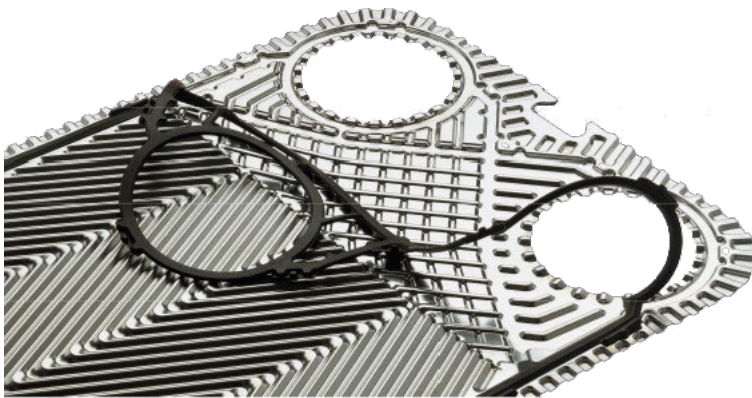

1.




2.



1. Gasketed plate heat exchangers
2. Braze plate heat exchangers

OEM and Custom made products

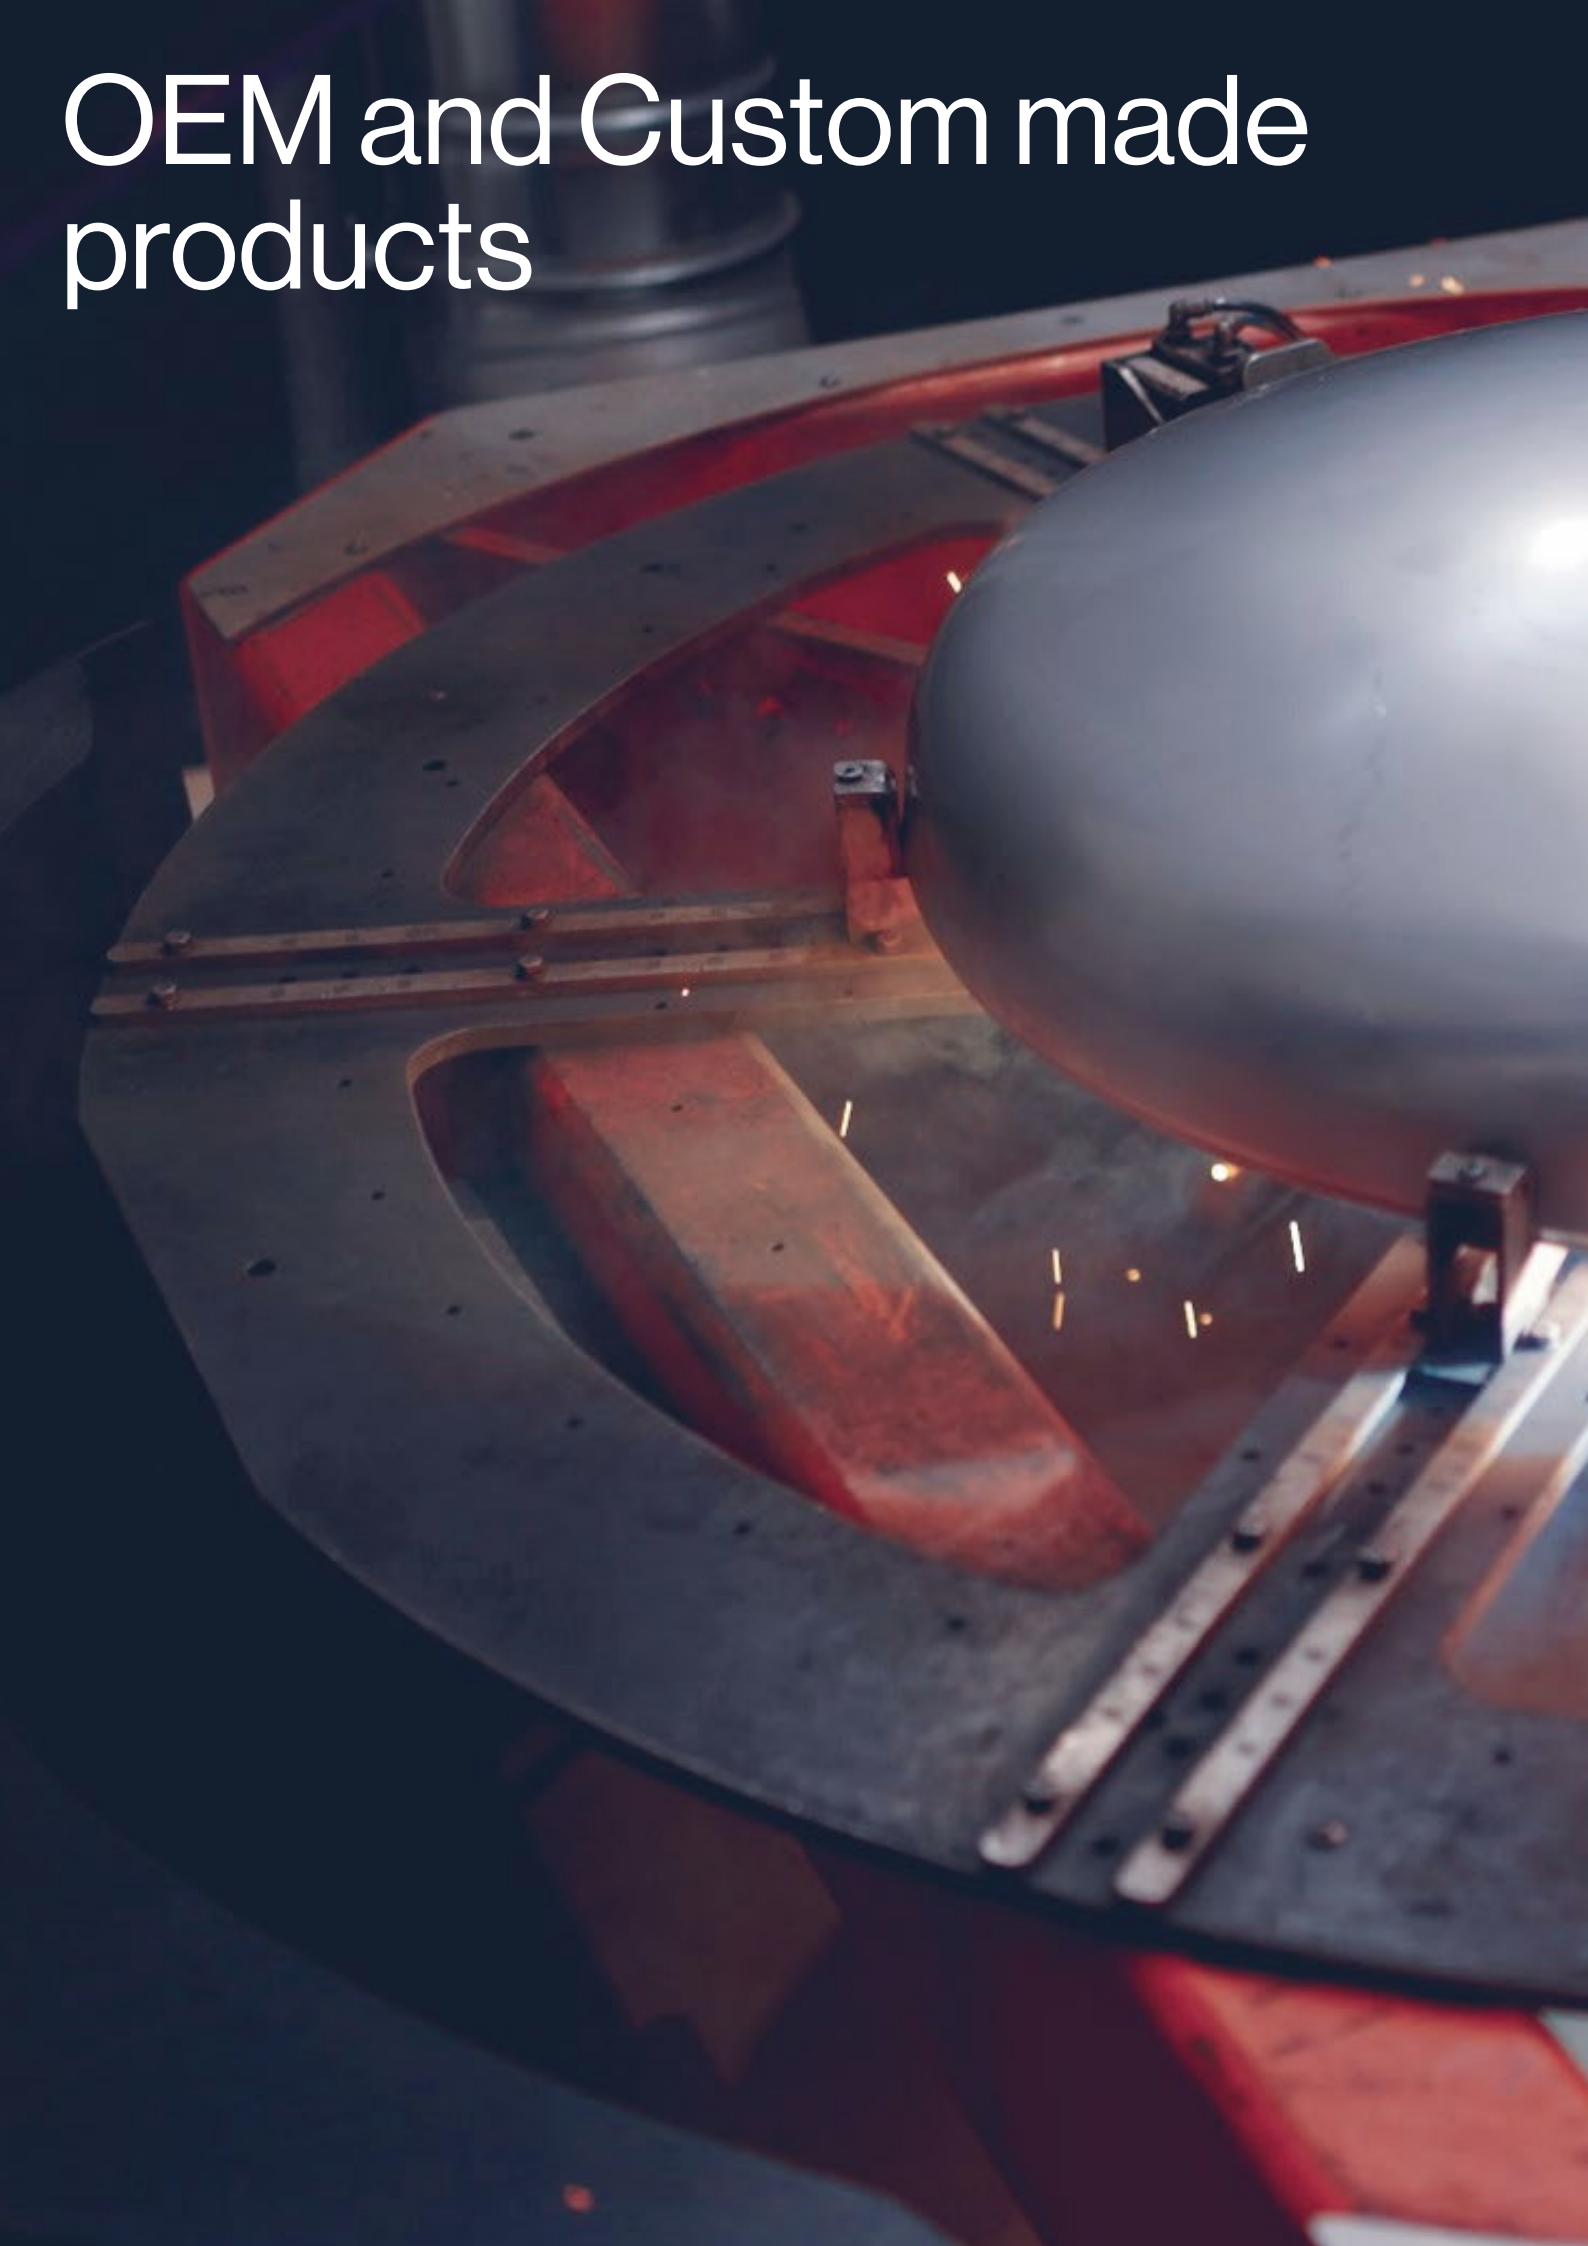



OEM Production


Original Equipment
Manufacturer

TML also operates in the OEM sector (Original Equipment Manufacturer), providing our customers with experienced and qualified technical support for the development of customized products. From body geometry to interior equipment, from insulation to finishing, labeling and packaging, we can provide the most detailed level of customization requests, and the customer can count on a prompt service delivery, high quality and qualified service support.




Custom Made Production

Bespoke production


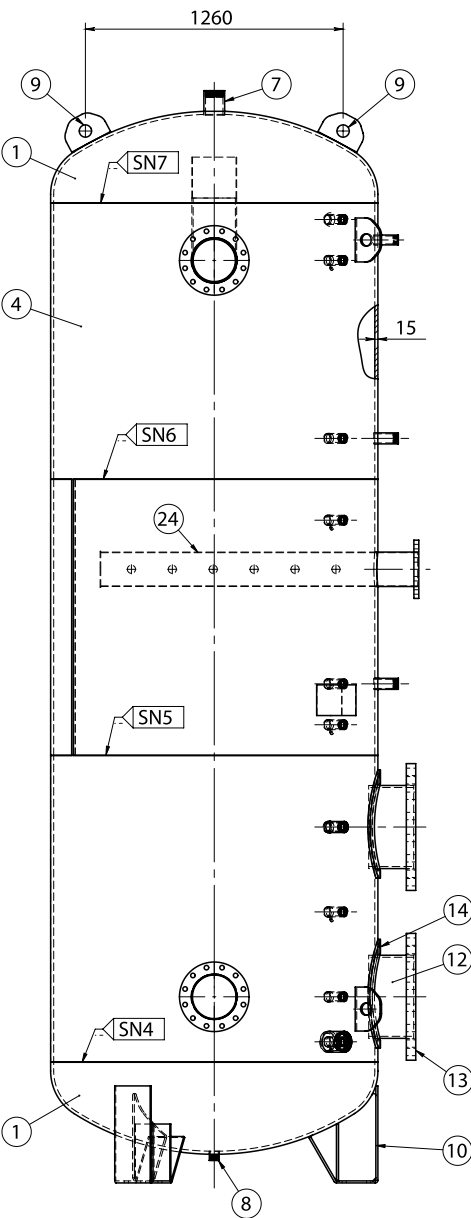


TML can produce calorifiers and buffer tanks of any capacity, from 12 to 100,000 liters, for domestic hot water, heating or cooling applications, industrial installations, heating or cooling districts. We produce custom cylinders with special connections for any installation, even with physical constraint or specific performance requirements. Application, material, capacity, operating pressure, diameter, height, heat exchangers, immersion heaters, connections: we can meet a wide range of requirements with an advanced and dedicated design and manufacturing organization.

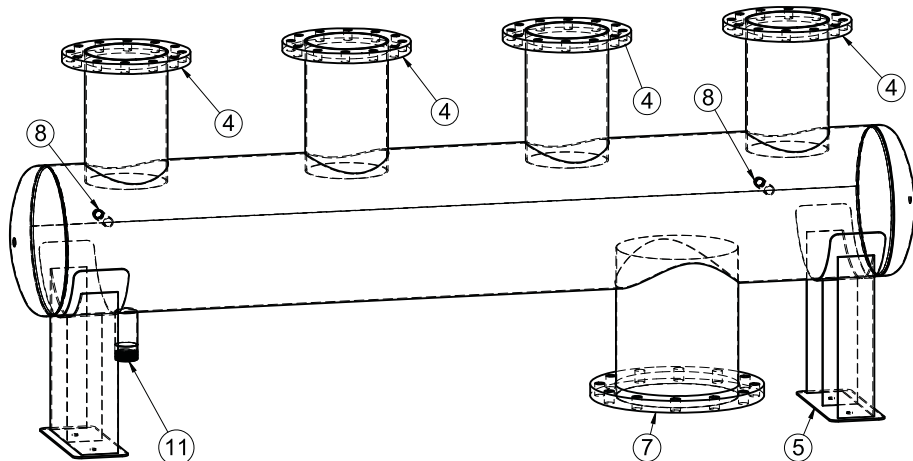



40.000 L stainless steel storage
The Coca Cola Company - Netherlands

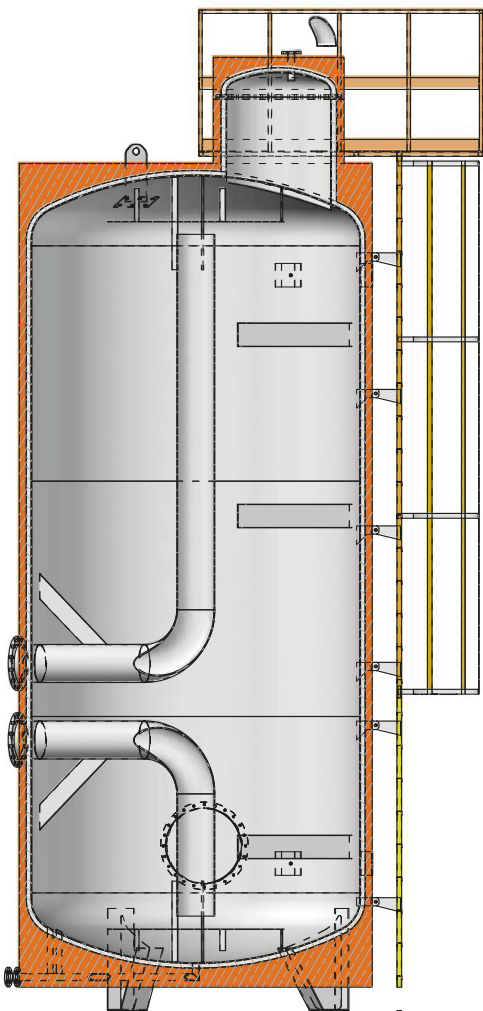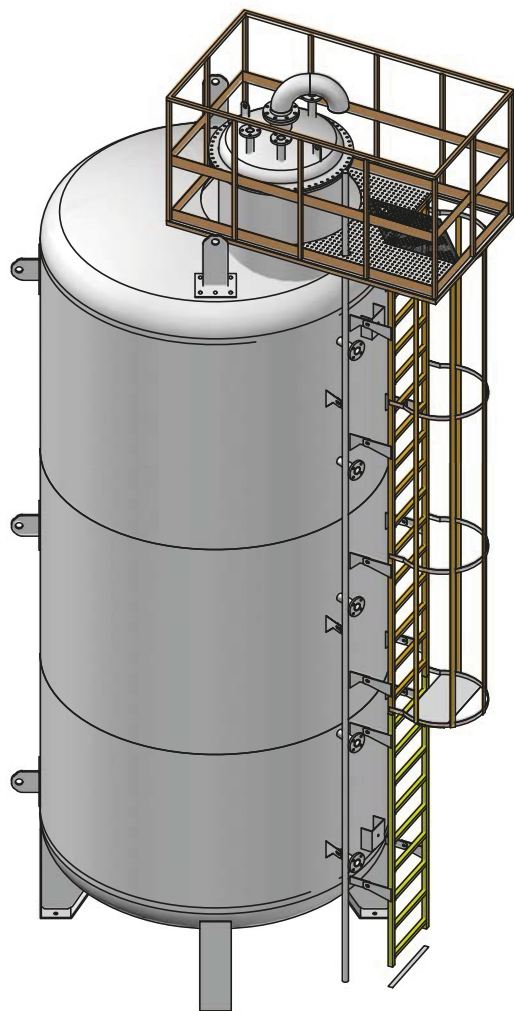



**50.000 L stainless steel buer storage for a
Pharmaceutical company in Switzerland**

**30.000 L. primary water buer storage
for a district heating in Austria**








**5.000 L chilled water buer storages
for a datacenter in Amsterdam**

**60.000 L. primary water buer storage
for a district heating - Poland**



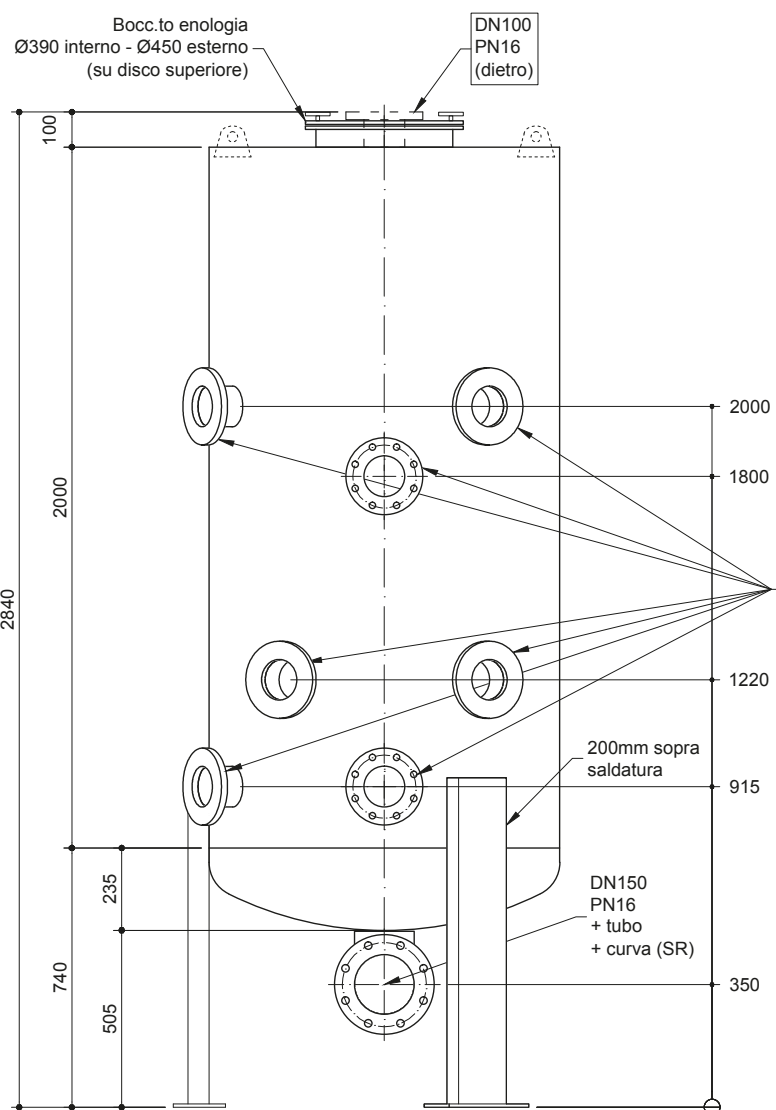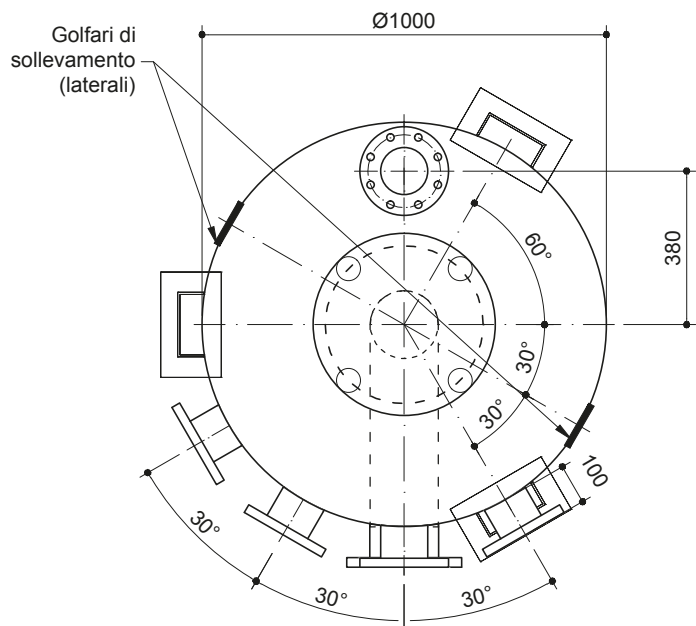

1500 L. stainless steel vented vessel

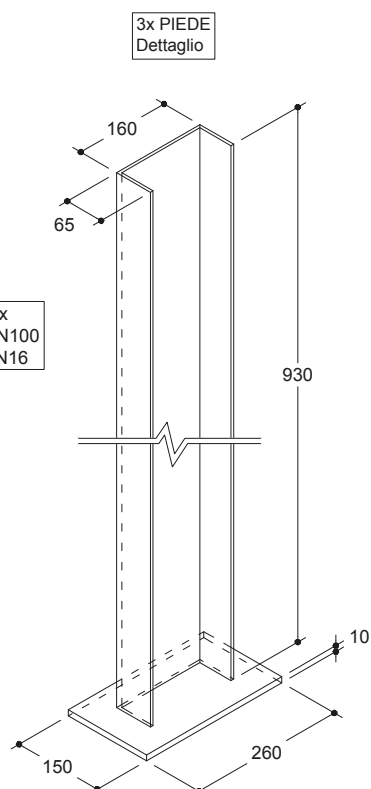

Certifications and associations

Going from a company to a certified company enabled us to add value to our business and to improve our internal procedures and operations, which ensure higher quality in terms of efficiency, product and ultimately of customer satisfaction.

Certifications



Proud members of





**Headquarters, carbon steel
facilities and R&D offices**

Frazione Favale
64010 Civitella del Tronto (TE) - Italy
T: +39 0861 927003
info@tmlgroup.it

**Sales and administration offices,
Stainless steel facility**

Zona artigianale Floriano
64020 Campi (TE) - Italy
T: +39 0861 927062

Fuel tanks facility

Zona artigianale Località Pardu Prenu
09071 Abbassanta (OR) - Italy
T: +39 0785 52669



www.tmlgroup.it
info@tmlgroup.it